

## DS-KD7003EY-IME2 2-wire HD Door Station



- Excellent Product Design: HD images and wide viewing angle with WDR
- Excellent Product Design: Compatible with released sub-modules (DIS is not supported for now)
- Easy to Use: Support mobile web configuration (AP mode)
- Easy to Use: DEC knobs configuration, Plug & play
- Easy to Use: Multiple indicators--Opening door, calling, on call, in use
- Easy to Use: Single and double buttons can be freely adjusted
- Supports two-lock control

## ▪ Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	4 GB
RAM	256 MB
CPU	Embedded Processor
Display parameters	
Screen size	NA
Operation method	NA
Type	NA
Resolution	NA
Video parameters	
Supplement light	Low illumination, IR supplement lights
Video standard	H.264
Lens	1
FOV	Horizontal: 133°, Vertical: 82°
WDR	Support
Resolution	2 MP
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U, G.711 A
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	2000
Linked indoor station capacity	Max.99
Sub door station capacity	16
Network parameters	
Wired network	10/100 Mbps self-adaptive through 2-wire interface
Wi-Fi	Only AP mode for configuration
Bluetooth	NA
3G/4G	NA
Device interfaces	
Alarm input	2 (supports Exit button or Door contact input)
Network interface	NA
TAMPER	1
Exit button	1
Door contact input	1
RS-485	2 (RS485 out for Hikvision's sub module communication, RS485 for reservation)
Wiegand	NA
TF card	NA
Alarm output	NA
DIP switch	6 decimal DIP switch


Lock control	2 (1 relay, max to 30 VDC, 2 A; 1 DC pulse, 20V 4A impulsive, 300 mA holding current, 30 ohm max )
Power interface	48V, Powered by distributor DS-KAD7060EY or 12VDC
Two-wire IP interface	1
<b>General</b>	
Button	0-2 (Flexible adjustment)
Installation	Surface mounting & flush mounting
Indicator	4 LED lights(Opening door、Calling、Intercom、In use)
Weight	With package: 426g ( 0.94lb),Without package: 290g ( 0.64lb)
Protective level	IP65 IK08
Working temperature	-40° C to 60° C (-22° F to 140° F)
Working humidity	10% to 90%
Dimensions	99.5 mm × 98.5 mm × 35 mm (3.92" × 3.88" × 1.37")
Battery	/
Power supply	48V, Powered by distributor DS-KAD7060EY or 12VDC
Application environment	Outdoor
Power consumption	≤ 6 W
Language	English, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch , Spanish, Romanian, Estonian, Croatian, Slovenian, Serbian, Ukrainian, Portuguese

### ▪ Available Model

DS-KD7003EY-IME2

DS-KD7003EY-IME2/DS-KIS704EY套装专用

### ▪ Dimension


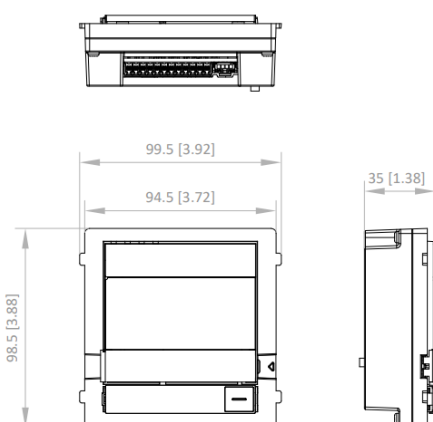





















Unit:mm [inch]

SCALE 1:1

▪ **Accessory**

▪ **Optional**

<p><b>DS-KD-KK</b> KD8 Series Pro Modular Door Station</p> 	<p><b>DS-KD-IN</b> KD8 Series Pro Modular Door Station</p> 	<p><b>DS-KD-BK</b> KD8 Series Pro Modular Door Station</p> 	<p><b>DS-KD-KP</b> KD8 Series Pro Modular Door Station</p> 	<p><b>DS-KD-M</b> KD8 Series Pro Modular Door Station</p> 
<p><b>DS-KD-E</b> KD8 Series Pro Modular Door Station</p> 	<p><b>DS-KD-ACW1</b> 2nd Video Intercom Brackets</p> 	<p><b>DS-KD-ACW2</b> 2nd Video Intercom Brackets</p> 	<p><b>DS-KD-ACW3</b> 2nd Video Intercom Brackets</p> 	<p><b>DS-KD-INFO</b> KD8 Series Pro Modular Door Station</p> 
<p><b>DS-KABD8003-RS1</b> Rain Shield of Module Door Station</p> 	<p><b>DS-KABD8003-RS2</b> Rain Shield of Module Door Station</p> 	<p><b>DS-KABD8003-RS3</b> Rain Shield of Module Door Station</p> 	<p><b>DS-KAW50-1N</b> 50W 12V Power Adapter</p> 	<p><b>DS-KD-ACF1/Plastic</b> 2nd Video Intercom Brackets</p> 
<p><b>DS-KD-ACF2/Plastic</b> 2nd Video Intercom Brackets</p> 	<p><b>DS-KD-ACF3/Plastic</b> 2nd Video Intercom Brackets</p> 	<p><b>DS-KD-TDM</b> Touch Display Module with M1 Card Reader</p> 	<p><b>DS-KD-TDE</b> Touch Display Module with EM Card Reader</p> 	<p><b>DS-KDE-ACR3</b> Video Intercom Brackets</p> 

				
<p><b>DS-KD-KP#EU</b>  <b>KD8 Series Pro</b>  <b>Modular Door</b>  <b>Station</b></p>	<p><b>DS-KD-ACW1#EU</b>  <b>2nd Video Intercom</b>  <b>Brackets</b></p>	<p><b>DS-KD-ACW2#EU</b>  <b>2nd Video Intercom</b>  <b>Brackets</b></p>	<p><b>DS-KD-ACW3#EU</b>  <b>2nd Video Intercom</b>  <b>Brackets</b></p>	<p><b>DS-KD-K12</b>  <b>Nametag module</b></p>
				
<p><b>DS-KD-K12/S</b>  <b>Nametag module</b></p>				
				

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

